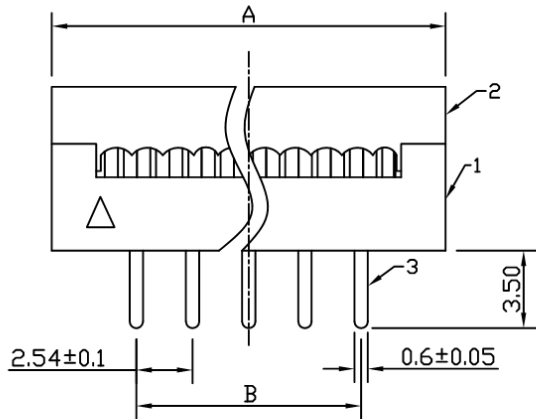
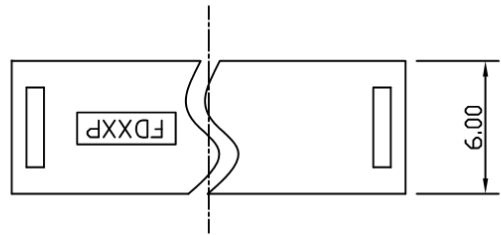


Posltion	Dim. A	TOL.	Dim. B	TOL.
10	17.80	±0.30	10.16	±0.25
14	22.82		15.24	
16	25.40		17.78	
20	30.52		22.86	
26	38.12		30.48	
30	43.32	±0.35	35.56	±0.35
34	48.40		40.64	
40	55.92		48.26	
50	68.72		60.96	
60	81.42		73.66	
64	86.38		78.74	

RECOMMEND PCB LAYOUT(TOLERANCE=±0.05)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 09/21/05'		

NOTES:

1. MATERIAL

- 1.1 INSULATOR:THERMOPLASTIC(UL 94V-0).
- 1.2 CONTACT: COPPER ALLOY.

2. SPECIFICATION

- 2.1 STORAGE TEMPERATURE:-20-70°C.
- 2.2 OPERATING TEMPERATURE:0-85°C.
- 2.3 CONTACT RESISTANCE:20mΩ max.
- 2.4 INSULATION RESISTANCE:1000MΩ min.
- 2.5 DIELECTRIC WITHSTANDING VOLTAGE:AC 500V PER MINUTE.

3. PRODUCT NUMBER CODE:

DS1018- X X X

HOUSING COLOR
B: BLACK

CONTACT PLATING
Si: Selective gold flash
8: Full gold flash
2: Gold flash + Nickel
6: Full Tin

No. OF CONTACTS
10 14 16 20 26 30 34
40 50 60 64

SERIES No.
DS1018

3	CONTACT		COPPER ALLOY	GOLD+TIN PLATED
2	COVER		THERMOPLASTIC	UL 94 V-0
1	HOUSING		THERMOPLASTIC	UL 94 V-0
ITEM	PART NAME	PART NO.	MATERILAS	FINISHED

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.60	X.	±5°	UNITS	mm	DIP PLUG CONNECTOR PITCH 2.54mm	
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1018 SERIES
.XX	±0.25	.XX	±2°	 宁波正青电子有限公司 NINGBO ZHENQIN ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.	C-DS1018-XXX						